

PRO Blue

750VA
450 WATT



Line Interactive UPS with intelligent LCD Display

Transfer to battery by under and over voltage

RJ11 Tel / Fax / Modem protection

Input and voltage range 90 - 150Vac

Overload and short circuit protection

AVR - Automatic Voltage Regulator

USB interface including software

Spike and Surge protection

Audible and visible alarm

Up to 65 min runtime

Battery cold start

2 year warranty (electronic)




Free Shutdown Software on CD for




PRO Blue

Rear Panel:

1. USB Interface port
2. Powercord
3. Fuse
4. Fax/Modem protection
5. Battery Protected Outlets
6. Spike protected Outlets



LCD Display:

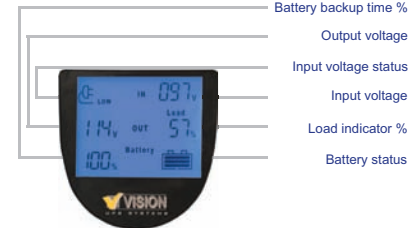

- Battery backup time %
- Output voltage
- Input voltage status
- Input voltage
- Load indicator %
- Battery status

Technical Specifications ▶▶

VA	750VA
Watt	450
Input Voltage Range	90 - 150 Vac
AVR Function	Boost & Trim
Input Frequency Range	60Hz
Output Voltage (Line mode)	120Vac (+/-10%)
Output Voltage (Battery mode)	120Vac (+/-5%)
Output Frequency (Battery mode)	60Hz (+/-1%)
Battery Capacity (& quantity)	9Ah x 1
Battery Backup Time	up to 65 minutes
Number of outlets	6
Interface Port	USB Technology
Fax / Modem Protection	✓
Dimensions	HxWxD 6.25 x 3.75 x 12.8 inch
Weight	15,4 Lbs
Protection	Overload, Short Circuit ✓
	Noise Suppression ✓
Warranty	2 Years
Shutdown Software (UPSilon2000)	Windows 95/98/NT/2003/XP/Netware, Linux, FreeBSD